

# Adjustable height platform for PAX DOOR access



3D front view of the platform


Mobile height-adjustable and towable platform for PAX DOOR access. Aluminum structure mounted on galvanized steel frame.

## Frame

- Retractable towbar
- Maximal speed 5 km/h
- 2 immobilization cranks
- Fixed wheels Ø300 mm at the rear and Ø160 mm swivel rubber-coated at the front

## Staircase

- Tilt : 50°
- First two steps galvanized steel non-slip grating - other steps non-slip aluminum coating
- Step width: 760 mm
- Height to serve: de 2500 à 3500 mm
- Height adjustable using a hydraulic jack and a hand pump operable from the ground
- Ramp composed of anodized handrail, intermediate rail, and baseboard

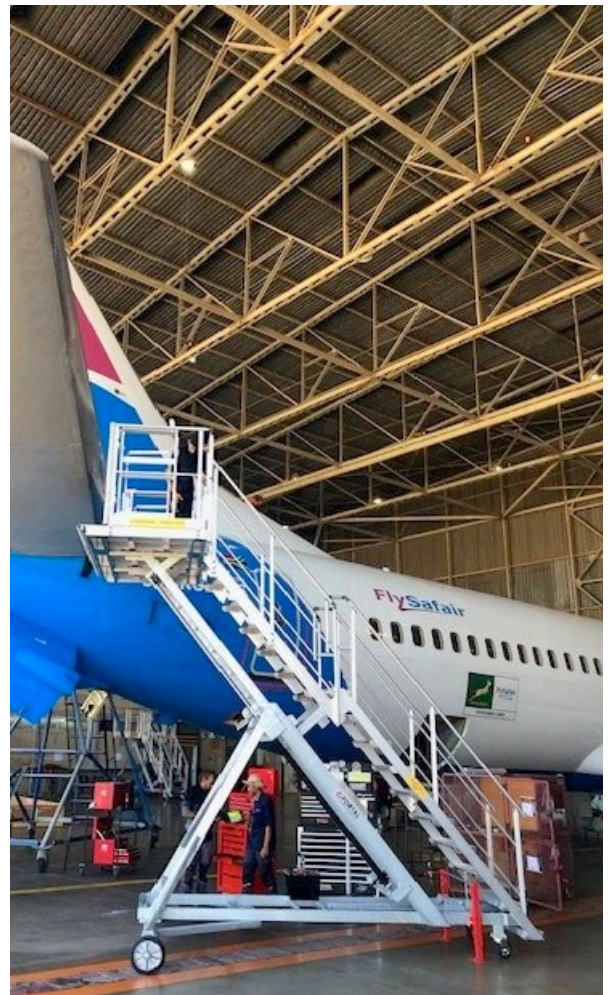

Maximum load capacity: 2 persons - 200 kg  
Compliant with standard NF EN 12312-8



# Adjustable height platform for PAX DOOR access



3D rear view of the platform



## Platform

- Anti-slip aluminum coating, size 2500 x 1250 mm
- Rubber protection at aircraft side
- Peripheral guardrail in two modules. One fixed module and one removable module at the front. Guardrail composed of anodized handrail, intermediary rail, and baseboard



Head Office & Plants : ZI du Muckental – F – 67140 BARR  
Phone +33(0)3 88 58 53 53 – Fax +33(0)3 88 58 53 54  
[www.aeronautique.fortal.fr/en](http://www.aeronautique.fortal.fr/en) – [info@ortal.fr](mailto:info@ortal.fr)